


**WARREN
RUPP®**

Quality System
ISO9001 Certified

Environmental
Management System
ISO14001 Certified

IDEX
IDEX CORPORATION

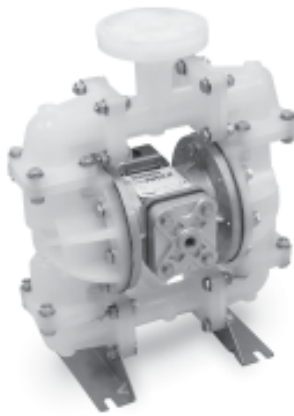

U.S. Patent #5,851,109; 5,996,627;
400,210; 6,241,487
Other U.S. Patents Applied for




SANDPIPER®
A WARREN RUPP PUMP BRAND

S10 Non-Metallic Design Level 1 Ball Valve

**Air-Powered
Double-Diaphragm Pump**

ENGINEERING, PERFORMANCE
& CONSTRUCTION DATA

INTAKE/DISCHARGE PIPE SIZE	CAPACITY	AIR VALVE	SOLIDS-HANDLING	HEADS UP TO	DISPLACEMENT/STROKE
Intake 1" ANSI Flange	Discharge 1" ANSI Flange	0 to 23 gallons per minute (0 to 87 liters per minute)	No-lube, no-stall design	Up to .15 in. (4mm)	100 psi or 231 ft. of water (7 bar or 70 meters)
					.026 Gallon / .098 liter

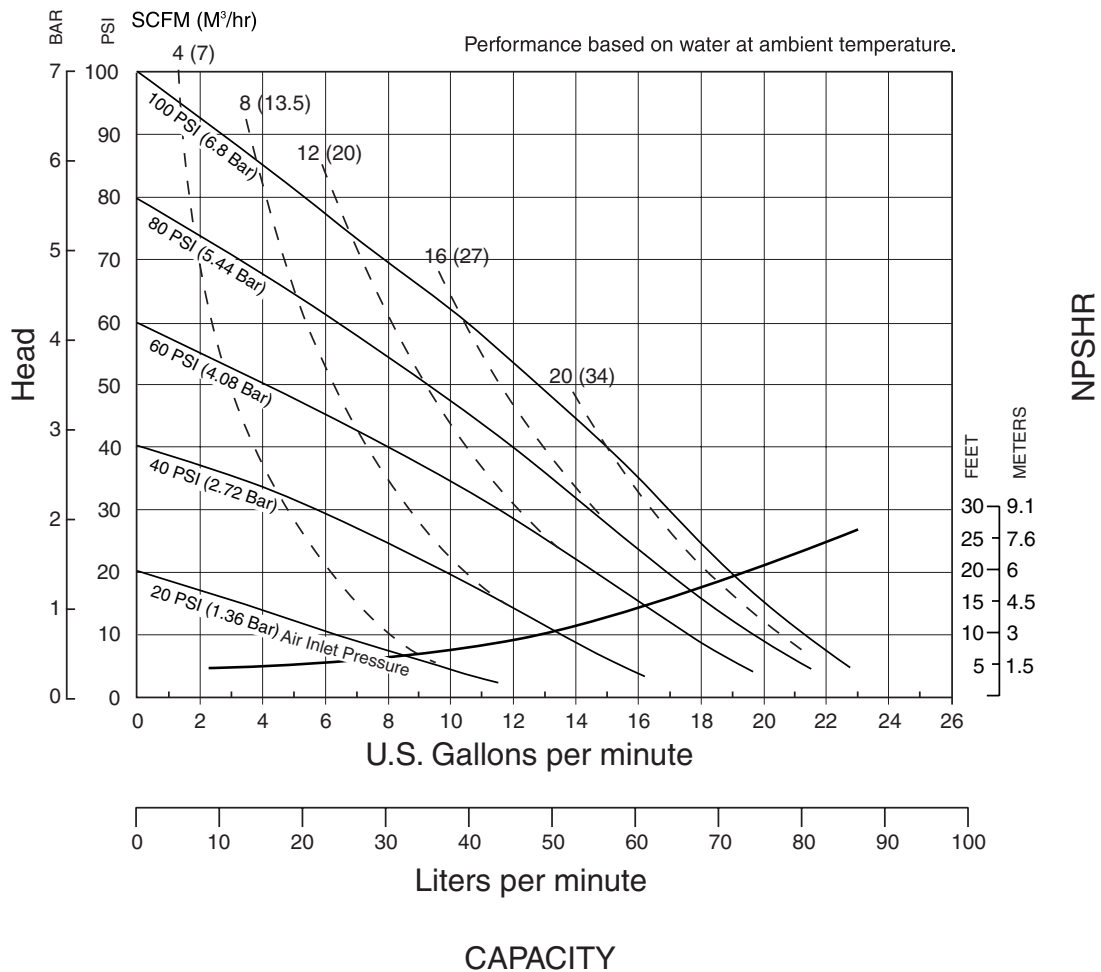

SANDPIPER® pumps are designed to be powered only by compressed air.

Explanation of Pump Nomenclature

S10 Non-Metallic · Design Level 1· Ball Valve

MODEL	Pump Brand	Pump Size	Check Valve Type	Design Level	Wetted Material	Diaphragm/ Check Valve Materials	Check Valve Seat	Non-Wetted Material Options	Porting Options	Pump Style	Pump Options	Shipping Kit Options	Weight lbs. (kg)
S10B1P1PPAS000.	S	10	B	1	P	1	P	P	N	S	0	00.	17 (8)
S10B1P2PPAS000.	S	10	B	1	P	2	P	P	N	S	0	00.	17 (8)
S10B1K1KPAS000.	S	10	B	1	K	1	K	P	N	S	0	00.	21 (9.5)
S10B1K2KPAS000.	S	10	B	1	K	2	K	P	N	S	0	00.	21 (9.5)
S10B1N1NPAS000.	S	10	B	1	N	1	N	P	N	S	0	00.	18 (9)
S10B1N2NPAS000.	S	10	B	1	N	2	N	P	N	S	0	00.	18 (9)

Pump Brand S= SANDPIPER®	1= Santoprene/Santoprene 2= Virgin PTFE-Santoprene Backup/Virgin PTFE 7= Santoprene/Buna 8= Virgin PTFE-Santoprene Backup.Viton	A= ANSI Flange N= NPT Threads 1= Dual Porting (NPT) 2= Top Dual Porting (NPT) 3= Bottom Dual Porting (NPT) 4= Dual Porting (BSP) 5= Top Dual Porting (BSP) 6= Bottom Dual Porting (BSP) B= BSP Threads	00.= None P0.= 10-30VDC Pulse Otput Kit P1.= Intrinsically-Safe 10-30VDC Pulse Output Kit P2.= 110/120 or 220/240VAC Pulse Output Kit P3.= Intrinsically-Safe 110/120VAC Pulse Output Kit P4.= Intrinsically-Safe 220/240VAC Pulse Output Kit E0.= Solenoid Kit with 24VDC Coil E1.= Solenoid Kit 24VDC Explosion-Proof Coil E2.= Solenoid Kit with 24VAC/12VDC Coil E3.= Solenoid Kit with 24VAC/12VDC Explosion-Proof Coil E4.= Solenoid Kit with 110VAC Coil E5.= Solenoid Kit with 110VAC Explosion-Proof Coil E6.= Solenoid Kit with 220VAC Coil E7.= Solenoid Kit with 220VAC Explosion-Proof Coil SP= Stroke Indicator Pins
10= 1"	8= Virgin PTFE-Santoprene Backup.Viton		
B= Ball T= Tihedral	K= PVDF N= Nylon P= Polypropylene		
1= Design Level	P= Polypropylene I= Polypropylene with PTFE Hardware	S= Standard	
K= PVDF N= Nylon P= Polypropylene		0= None 2= Mesh Muffler	



CAUTION! Operating temperature limitations are as follows:

Materials	Operating Temperatures		
	Maximum*	Minimum*	Optimum**
Santoprene® Injection molded thermoplastic elastomer with no fabric layer. Long mechanical flex life. Excellent abrasion resistance.	212°F 100°C	-10°F -23°C	50°F to 212°F 10°C to 100°C
Virgin PTFE Chemically inert, virtually impervious. Very few chemicals are known to react chemically with PTFE: molten alkali metals, turbulent liquid or gaseous fluorine and a few fluoro-chemicals such as chlorine trifluoride or oxygen difluoride which readily liberate free fluorine at elevated temperatures.	212°F 100°C	-35°F -37°C	50°F to 212°F 10°C to 100°C
PVDF	200°F -93°C	-10°F -13°C	
Polypropylene	150°F 65°C	-40°F 5°C	
Polyutethane	210°F 99°C	-40°F -40°C	-40°F to 210°F -40°C to 99°C
Nylon	120°F 48°C	32°F 0°C	

For specific applications, always consult "Chemical Resistance Chart" Technical Bulletin


*Definite reduction in service life.

**Minimal reduction in service life at ends of range.

Dimensions: S10 Non-Metallic

Dimensions in Inches

Dimensional Tolerance: $\pm 1/8$ "

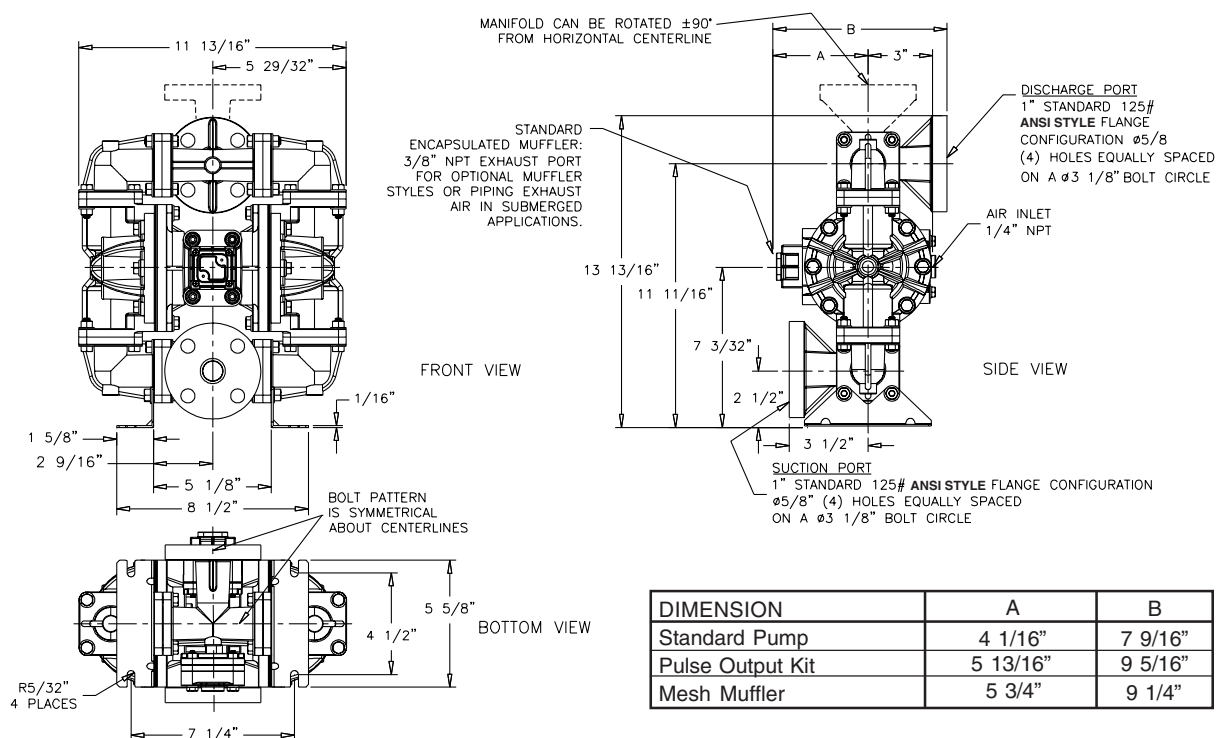

Dimensions in Millimeters

Dimensional Tolerance: ± 3 mm

