


**WARREN
RUPP®**

Quality System
ISO9001 Certified

Environmental
Management System
ISO14001 Certified

IDEX
IDEX CORPORATION

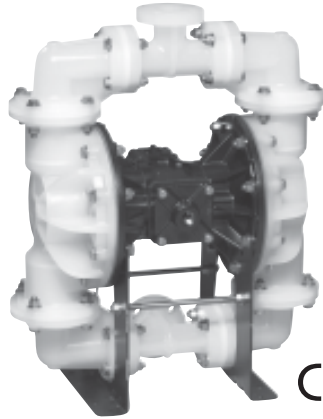

U.S. Patent #5,996,627 & 6,241,487
Other U.S. Patents Applied for


SANDPIPER®
A WARREN RUPP PUMP BRAND

S15 Non-Metallic Design Level 2 Ball Valve

**Air-Powered
Double-Diaphragm Pump**

ENGINEERING, PERFORMANCE
& CONSTRUCTION DATA

INTAKE/DISCHARGE PIPE SIZE	CAPACITY	AIR VALVE	SOLIDS-HANDLING	HEADS UPTO	DISPLACEMENT/STROKE
1½" ANSI Flange or PN10 40mm DIN Flange	0 to 90 gallons per minute (0 to 340 liters per minute)	No-lube, no-stall design	Up to .47 in. (12mm)	100 psi or 231 ft. of water (7 bar or 70 meters)	.36 Gallon / 1.36 liter

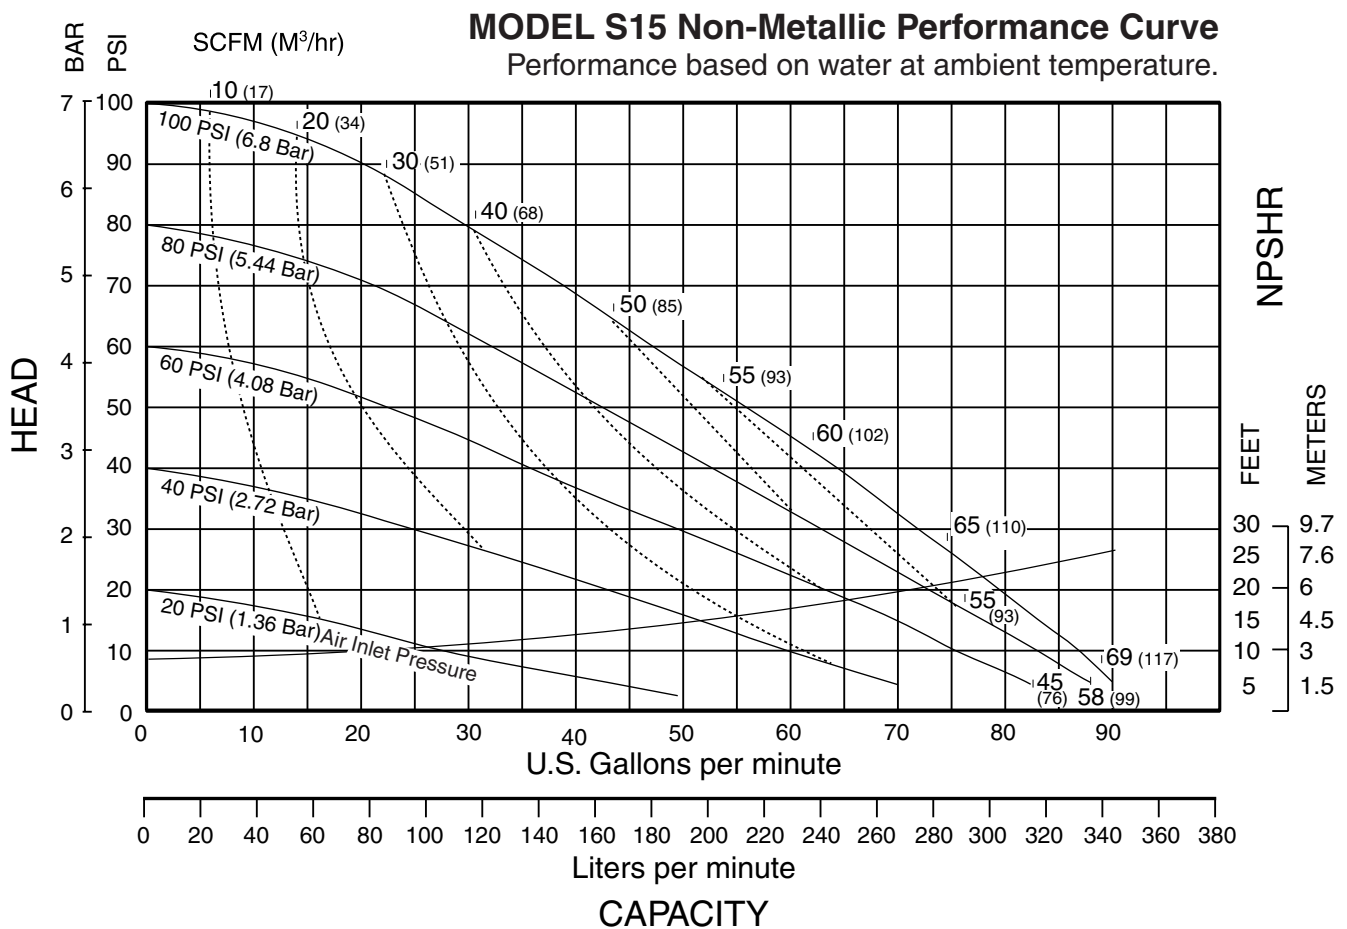

SANDPIPER® pumps are designed to be powered only by compressed air.

Explanation of Pump Nomenclature

S15 Non-Metallic · Design Level 2· Ball Valve

Model	Pump Brand	Pump Size	Check Valve Type	Design Level	Wetted Material	Diaphragm/Check Valve Materials	Check Valve Seat	Non-Wetted Material Options	Porting Options	Pump Style	Pump Options	Shipping Kit Options	Weight lbs. (kg)
S15B2P1PQAS000.	S	15	B	2	P	1	P	Q	A	S	0	00.	53 (24)
S15B2K1KQAS000.	S	15	B	2	K	1	K	Q	A	S	0	00.	65 (29)
S15B2P2PQAS000.	S	15	B	2	P	2	P	Q	A	S	0	00.	53 (24)
S15B2K2KQAS000.	S	15	B	2	K	2	K	Q	A	S	0	00.	65 (29)
S15B2P3PQAV000.	S	15	B	2	P	3	P	Q	A	V	0	00.	58 (26)
S15B2K3KQAV000.	S	15	B	2	K	3	K	Q	A	V	0	00.	77 (35)
S15B2P4PQAV000.	S	15	B	2	P	4	P	Q	A	V	0	00.	58 (26)
S15B2K4KQAV000.	S	15	B	2	K	4	K	Q	A	V	0	00.	77 (35)

Pump Brand
S= SANDPIPER®

Pump Size
15=1½"

Check Valve Type
B= Ball

Design Level
2= Design Level

Wetted Material
K= PVDF
P= Polypropylene

Diaphragm Check Valve Materials
1= Santoprene/Santoprene
2= PTFE-Santoprene Backup/PTFE
3= PTFE Pumping, PTFE-Santoprene Backup Driver/PTFE
4= Santoprene Pumping, Santoprene Driver/Santoprene

Check Valve Seat
K= PVDF
N= Nylon
P= Polypropylene

Non-Wetted Material Options
A= Painted Aluminum
J= Painted Aluminum PTFE
Q= Epoxy Coated Aluminum
K= PTFE Coated Aluminum
L= PTFE Coated Aluminum with PTFE Coated Hardware
R= Epoxy Coated Aluminum with PTFE Coated Hardware

Porting Options
A= ANSI Flange
D= DIN Flange
7= Dual Porting (ANSI)
8= Top Dual Porting (ANSI)
9= Bottom Dual Porting (ANSI)

Pump Style
D=Containment Duty with Electronic Leak Detection (110V)
E=Containment Duty with Electronic Leak Detection (220V)
M=Containment Duty with Mechanical Leak Detection
S= Standard
V=Containment Duty with Visual Leak Detection

Pump Options
0= None
2= Mesh Muffler
3= High temperature Air Valve w/Encapsulated Muffler
4= High temperature Air Valve w/3M Muffler
5= High temperature Air Valve w/Mesh Muffler

Kit Options
00.=None
P0.=0-30VDC Pulse Output Kit
P1.=Intrinsically-Safe 10-30VDC Pulse Output Kit
P2.=110/120 or 220/240VAC Pulse Output Kit
P3.=Intrinsically-Safe 110/120VAC Pulse Output Kit
P4.=Intrinsically-Safe 220/240VAC Pulse Output Kit
SP.=Stroke Indicator Pins


 **CAUTION! Operating temperature limitations are as follows:**

Materials	Operating Temperatures	
	Maximum	Minimum
Santoprene® Injection molded thermoplastic elastomer with no fabric layer. Long mechanical flex life. Excellent abrasion resistance.	275°F 135°C	-40°F -40°C
Virgin PTFE Chemically inert, virtually impervious. Very few chemicals are known to react chemically with PTFE: molten alkali metals, turbulent liquid or gaseous fluorine and a few fluoro-chemicals such as chlorine trifluoride or oxygen difluoride which readily liberate free fluorine at elevated temperatures.	220°F 104°C	-35°F -37°C
PVDF	250°F 121°C	0°F -18°C
Polypropylene	180°F 82°C	32°F 0°C
UHMW PE	180°F 82°C	-35°F -37°C


For specific applications, always consult "Chemical Resistance Chart" Technical Bulletin

Dimensions: S15 Non-Metallic

Dimensions in Inches
Dimensional Tolerance:±1/8"

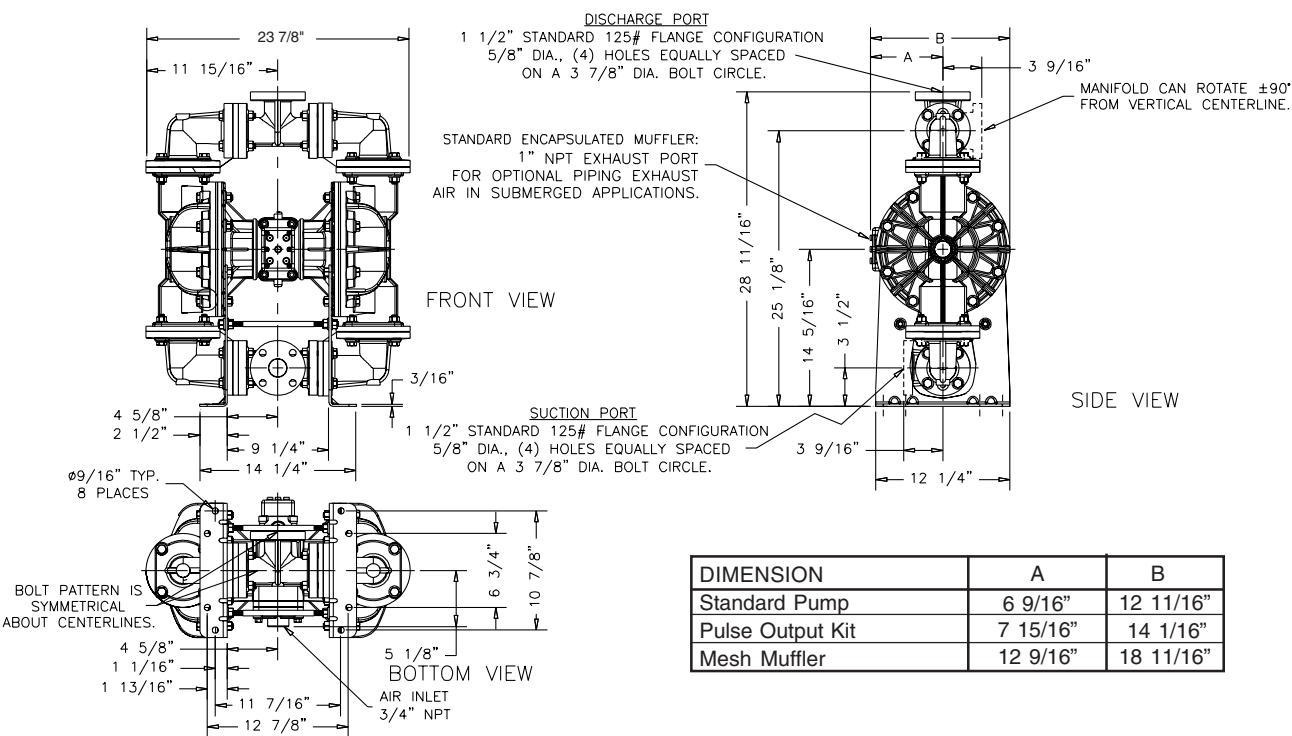

Dimensions in Millimeters
Dimensional Tolerance:± 3mm

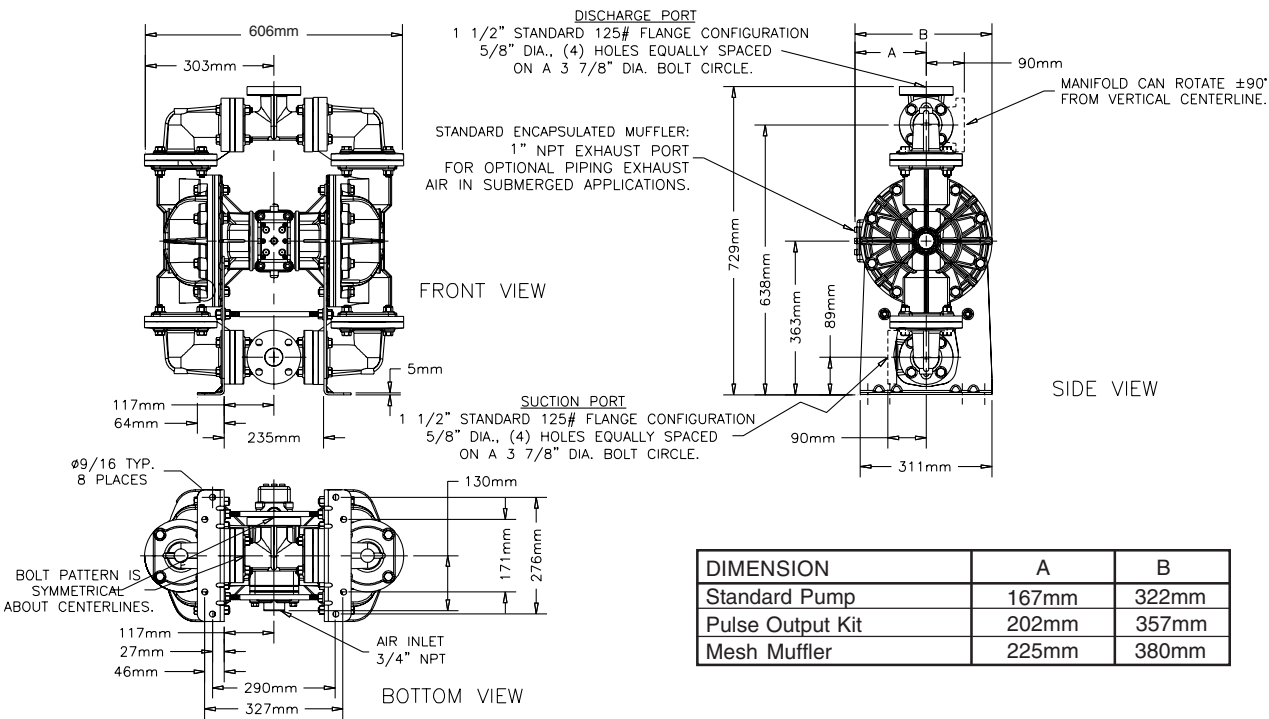

Dimensions: S15 Non-Metallic with Spill Containment

